

**AREA:** PRINCIPAL  
**EMPRESA** EBIR ILUMINACIÓN, S.L.  
**USUARIO** 320-JOAQUÍN AGUILAR HUEZO  
**FECHA IMPRESIÓN** 04/11/2014



**TITULO DE INFORME:** RE-33014 FICHA TECNICA VENTA EBIR APLIQUES roca

**DESCRIPCIÓN INFORME** INFORME DE ETIQUETAS DE ARTÍCULOS SIMPLE

**FILTROS**

Artículo: E25857CI  
Tipo: <Todos>  
Clase: <Todos>  
Grupo: <Todos>  
Almacén: 0


**ORDENADO POR:**

Ordenado por ARTÍCULO (Ascendente)

MODEL: APLIQUE ESTHER S-3R CR 30X10 LED CII IP44 1X12W 800MM

CODE: E25857CI

DIMENSIONS OF PRODUCT:

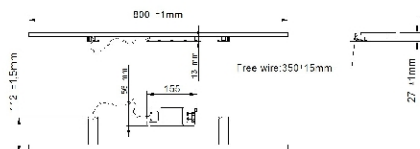

CRITERIA OF EXTERIOR ASPECT(RE-33033):  
QUALITY OF PRODUCT:

		QUALITY SYMBOLS	
1- Fixing system:			
2- Top side:			NORMAL
3- Front side:			GOOD
4- Bottom side:			VERY GOOD

MATERIALS AND DECORATIONS:

Metal: Aluminium/Zamak Finish: Bright chrome  
Methacrylate protector

FIXING TO SURFACE:

Wooden frame

BOXING

INSIDE	UNITS	MEASUREMENT	WEIGHT "kg"	VOLUME "m3"	COMPONENTS
Box	1	0.035 0.12 0.81	0,58	0,003402	1 Applied with power supply wiring 1 Bag with screws 1 Square and accessories bag; 2 Instruction sheet
OUTSIDE					
Lot box	10	0.2 x 0.27 x 0.83	9,10	0,044820	10 Individual boxes by batch
Palet	360	1.95 x 0.83 x 1.2	329,6	1,942200	36 Industrial boxes x 10 individual

MANUFACTURING REQUIREMENTS:

Minimum of production: 500 Un.  
Delivery time: 55 Working days

SPARE

E25895-Power supply 12W AED12-700IIP44; E26055EI-UTE

ELECTRIC POWER

Nominal voltage	Power	Lamp holder	Lamp	Connexion to network
230V-50Hz	MAX 1X12W	LED		Using driver 12W AED12-700IIP44

STANDARIZATION AND CLASSIFICATION

		IP44	
UNE-EN 60598			0,10m

certificate n°
CC_EBIR130901

ILLUMINANCE AND LIGHT SOURCE

Light temp	life bulb	Lux	Direction of
5700K	45000h	1) 1440	
±300K		2) 555	
		3) 220	

ECO DESIGN	
	Ecological impact value
	Low
	0,647